
SUPERSTAR

Passive Stereo Speaker

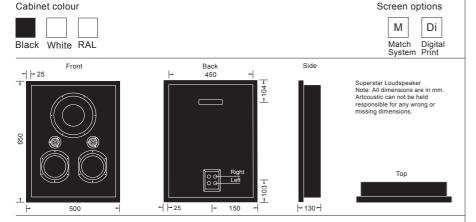

SUPERSTAR PASSIVE

3-way full range passive music centre with built-in subwoofer. 2 x 5.5 inch LF-MF units, 2 x 1.5 inch 90 degree X2 HF unit, 1 x 10" subwoofer and a 2x150watt amplifier into 80hm. All screen options are available for the SUPERSTAR: The Match System / Digital Prints.

Operating Range: 30 Hz to 40 KHz

Beamwidth HF: 90 degree X2 with Target lens 160 degree

FR: SPL 1 Watt 93dB Max SPL 106 dB SPL avg 4 ohm continuous power handling 120 W

LF: Max SPL 106 dB SPL avg 4 ohm continuous power handling 120 W

HF: Max SPL 106 dB.

continuous power handling 100 W
Connections: Gold plated push terminals
Dimensions: 650 H x 500 W x 130 D mm.

Weight: 13 kg each

Superstar Passive Technical highlights

Tweeter:

Dual Ring Radiator diaphragm

Highly linear suspension and Low loss surrounds for high clarity and clean transient response

Copper caps for better HF extension and lower distortion

Wave-guide center plug, copper-clad aluwire

Woofer:

Extra long excursion and Aluminum Short Circuiting Ring

4-layer voice coil, anodized aluminum for improved heat dissipation.

Distortion Reduced Motor

Rigid Cast Steel Basket

Crossover:

Linear Phase 6 and 12 dB per octave

Applications

2-channel stereo

max SPL 1m 106dB max SPL 4m 102dB

Restaurant - Bar - fixed installation - boardroom, auditorium max SPL 1m 106 dBmax SPL 4m 102dB