
## Diablo Monitor X2

Studio Monitor Loudspeaker

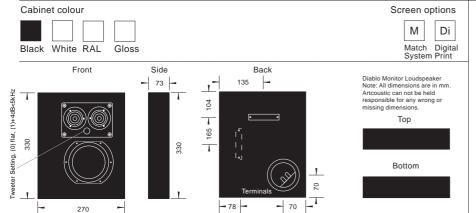

## Diable Monitor X2

The Diablo Monitor X2 is a versatile compact speaker, which punches above its weight, delivering extremely high sound pressure levels from lowpowered (20W+) amplifiers.

The two X2 tweeters deliver an extended frequency response of up to 40kHz at 96dB (1w +/-2dB), while a 5.5" long-throw mid-woofer pushes low frequency response down to a satisfying 45Hz. The Monitor is ideal for near-field studio monitoring, for small to medium sized home cinema installations, and for commercial use in bars, restaurants and corporate presentation facilities. Like all Artcoustic speakers, it looks just as great as it sounds. Use it in conjunction with an Artcoustic subwoofer to push the bottom-end performance even lower.

## Diablo Monitor X2

2-way Studio Monitor. 1 x 5.5 inch LF-MF unit, 2 x 1.5 inch X2 HF unit. All screen options are available for the Diablo Monitor: The Match System/Digital Prints.

Operating Range: 45 Hz to 40 KHz Beamwidth HF: 90 degree X2

FR: SPL 1 Watt 93dB Max SPL 104 dB avg 8 ohm continuous power handling 150 W

LF: Max SPL 104 dB avg 8 ohm continuous power handling 150 W
HF: Max SPL Switch setting (0) 106 dB, setting (1) 114 dB avg 4 ohm

continuous power handling 100 W

Connections: Gold plated push terminals, single amp

Dimensions: 330 H x 270 W x 73 D mm

Weight: 4.5 kg each

## **Applications**

2-channel stereo / mid field / fullspace studio monitoring max SPL 1m 104dB max. SPL 4m 98dB

Home Cinema, medium - large room, screening room max SPL 1m 104dB max SPL 4m 98dB

Restaurant - Bar - fixed installation - boardroom, auditorium max SPL 1m 104dB max SPL 4m 98dB